

## Seagate Barracuda Pro disco rigido interno 1 TB 7200 Giri/min 128 MB 2.5" Serial ATA III

**Marchio :** Seagate

**Famiglia del prodotto:**  
Barracuda

**Codice prodotto:**  
ST1000LM049

**Nome del prodotto :** Pro

Seagate Barracuda Pro. Capacità hard disk: 1 TB, Velocità di rotazione hard disk: 7200 Giri/min, Dimensione del buffer HDD: 128 MB, Dimensione hard disk: 2.5", Interfaccia: Serial ATA III



| Caratteristiche                                             |                | Condizioni ambientali                   |                  |
|-------------------------------------------------------------|----------------|-----------------------------------------|------------------|
| Capacità hard disk *                                        | 1 TB           | Intervallo temperatura di funzionamento | 0 - 60 °C        |
| Velocità di rotazione hard disk *                           | 7200 Giri/min  | Intervallo di temperatura               | -40 - 70 °C      |
| Dimensione del buffer HDD *                                 | 128 MB         | Range di umidità di funzionamento       | 5 - 90%          |
| Dimensione hard disk *                                      | 2.5"           | Umidità                                 | 5 - 95%          |
| Interfaccia *                                               | Serial ATA III | Vibrazione di funzionamento             | 2 G              |
| Tipo *                                                      | HDD            | Vibrazione di non-funzionamento         | 5 G              |
| Componente per *                                            | PC             | Altitudine di funzionamento             | -304,8 - 3048 m  |
| Velocità di trasferimento dell'interfaccia del disco rigido | 6 Gbit/s       | Altitudine di non-funzionamento         | -304,8 - 12192 m |
| Velocità di trasferimento sostenuta dal disco rigido        | 160 MiB/s      | Shock di funzionamento                  | 400 G            |
| Numero testine hard disk                                    | 2              | Shock di non-funzionamento              | 1000 G           |
| Tempo di ricerca da traccia a traccia                       | 0,5 ms         | Dimensioni e peso                       |                  |
| Latenza media                                               | 11,5 ms        | Larghezza                               | 69,8 mm          |
| Byte per settore                                            | 4096           | Altezza                                 | 7 mm             |
| Ciclo avvio/ferma                                           | 600000         | Profondità                              | 100,3 mm         |
| Limite della frequenza di carico di lavoro                  | 55 TB/anno     | Peso                                    | 90 g             |
| Gestione energetica                                         |                | Dati su imballaggio                     |                  |
| Tensione operativa                                          | 5 V            | Quantità per pacco                      | 1 pz             |
| Corrente di start-up                                        | 1 A            | Dati logistici                          |                  |
|                                                             |                | Codice del Sistema Armonizzato (SA)     | 84717050         |
|                                                             |                | Altre caratteristiche                   |                  |
|                                                             |                | Tempo di ready                          | 3,2 s            |



0763649115756




763649115756



0763649101698



763649101698

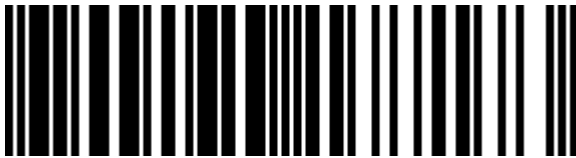

5704174177173



5415247171416



0763649128206



763649128206



7330381721564

**Catalog Object Cloud**



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.