



imou

DB61i Wired

5MP Video Doorbell

DB61i delivers 5MP live monitoring experience with a 5MP sensor. It is able to capture more details with the 164° fish eye lens. DB61i supports night vision mode for clear-as day clarity even in pitch dark. With IP65 certified, the doorbell can be used outdoors under different weather conditions. The support of dual-band Wi-Fi enables DB61i to provide more Wi-Fi choice and extend the Wi-Fi connectivity. Furthermore, it is equipped with a smart night light, which can be used to notify motion detections and illuminate in the night.



H.265 5MP QHD
See more than 2K



Human Detection

Quickly find human targets in you home



Night Vision

Support night vision for clear-as day clarity even in pitch dark



Active Deterrence

Scare away unwelcome visitors with built-in spotlight and siren



IP65

Weatherproof from dust and water



Two-way Talk

Real-time communicate with people at the camera



Diversified Storage

Supports NVR, Cloud Storage or Micro SD card (up to 256GB)




Alarm Notification

Sends instant motion-activated alerts to your mobile phone



Wi-Fi Connection

IEEE802.11b/g/n

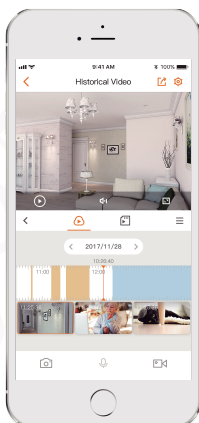


Stay close with what you care


With Cloud service, you will have access to what you care as long as Internet is available. You can record motion videos on Cloud and play back anytime anywhere.

<http://www.imoulife.com>

Front View

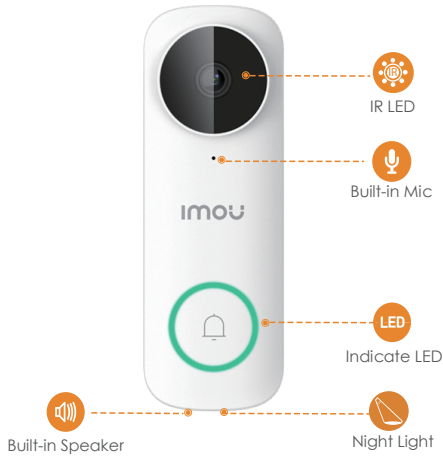

Back View

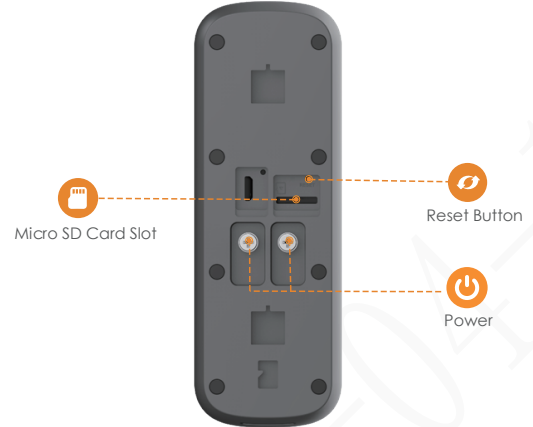

Specifications

Camera

5 Megapixel progressive CMOS
5MP(2560 x 1920)
Night Vision: 5m(16.5ft) distance
2.0mm fixed lens
Field of View: 164°

Video & Audio

Video Compression: H.265
Audio Compression: AAC
Up to 15fps Frame Rate
Two-way Bidirectional Talk
Echo cancellation

Notice Management

Call Notification
Motion Detection
Human Detection
Configurable Detection Area

Network

Wi-Fi: IEEE802.11b/g/n,2.4GHz & 5GHz
Imou life app: iOS, Android

Auxiliary Interface

Micro SD Slot (up to 256GB)
Built-in Mic & Speaker
Reset button
Micro USB power port

General

AC16~24V, DC12/24V Power supply
Power Consumption: <0.7A
Surface mounted
Working Environment: -20°C~+50°C, Less than 95%RH
Dimensions: 110 × 45 × 23mm (4.3 × 1.8 × 0.9inch)
CE, FCC, FCC ID, IC, IC ID

What's in the box

