



TP-Link TL-SG108S Non gestito Gigabit Ethernet (10/100/1000)  
Nero

Marchio : TP-Link

Codice prodotto: TL-SG108S V1

Nome del prodotto : TL-SG108S

TP-Link TL-SG108S. Tipo interruttore: Non gestito. Tipo di porte RJ-45: Gigabit Ethernet (10/100/1000),  
Quantità di porte RJ-45: 8. Full duplex. Dimensioni tavola MAC: 4000 voci, Capacità di commutazione: 16  
Gbit/s. Standard di rete: IEEE 802.1p, IEEE 802.3, IEEE 802.3ab, IEEE 802.3u, IEEE 802.3x. Montabile a  
parete



| Management features                             |   | Performance                       |             |
|---|---|-----------------------------------|-------------|
| Switch type *                                   | Unmanaged   | Plug and Play                     | ✓           |
| Quality of Service (QoS) support                | ✓   | Power                             |             |
| Ports & interfaces                              |   | Power source *                    | DC          |
| Basic switching RJ-45 Ethernet ports quantity * | 8   | Power supply included *           | ✓           |
| Basic switching RJ-45 Ethernet ports type *     | Gigabit Ethernet (10/100/1000)                                  | Input current                     | 0.6 A       |
| Gigabit Ethernet (copper) ports quantity        | 8   | Input voltage                     | 9 V         |
| Network   |   | Output voltage                    | 9 V         |
| Networking standards *                          | IEEE 802.1p, IEEE 802.3, IEEE 802.3ab, IEEE 802.3u, IEEE 802.3x | Power consumption (max)           | 3.3 W       |
| 10G support *                                   | ✗   | Power over Ethernet (PoE)         |             |
| Copper ethernet cabling technology              | 10BASE-T, 100BASE-TX, 1000BASE-T                                | Power over Ethernet (PoE) *       | ✗           |
| Cable types supported                           | Cat3, Cat4, Cat5, Cat5e   | Operational conditions            |             |
| Full duplex                                     | ✓   | Operating temperature (T-T)       | 0 - 40 °C   |
| Flow control support                            | ✓   | Storage temperature (T-T)         | -40 - 70 °C |
| Auto MDI/MDI-X                                  | ✓   | Operating relative humidity (H-H) | 10 - 90%    |
| Auto-negotiation                                | ✓   | Storage relative humidity (H-H)   | 5 - 90%     |
| Data transmission                               |   | Weight & dimensions               |             |
| Switching capacity *                            | 16 Gbit/s   | Width                             | 158 mm      |
| Forwarding rate                                 | 11.9 Mpps   | Depth                             | 100.6 mm    |
| MAC address table *                             | 4000 entries  | Height                            | 25.4 mm     |
| Store-and-forward                               | ✓   | Packaging content                 |             |
| Jumbo frames support                            | ✓   | Cables included                   | AC          |
| Jumbo frames                                    | 16000   | Quick start guide                 | ✓           |
| Packet buffer memory                            | 1.5 MB  | Packaging data                    |             |
|   |   | AC adapter included               | ✓           |
|   |   | Package type                      | Box         |


| Security        |       | Packaging data              |               |
|-----------------|-------|-----------------------------|---------------|
| IGMP snooping   | ✓     | Rubber feet                 | ✓             |
| Design          |       | Package width               | 191 mm        |
| Rack mounting * | ✗     | Package depth               | 130 mm        |
| Product colour  | Black | Package height              | 92 mm         |
| LED indicators  | ✓     | Package weight              | 520 g         |
| Wall mountable  | ✓     | Certificates                |               |
|                 |       | Certification               | CE, FCC ,RoHS |
|                 |       | Logistics data              |               |
|                 |       | Harmonized System (HS) code | 85176990      |



6935364083526



6935364096694

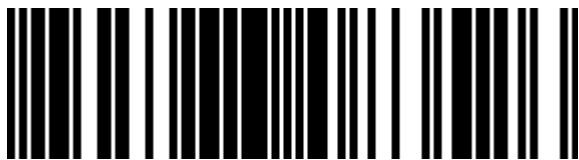

0845973083526



845973083526

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.